


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1		RELEASED FOR PRODUCTION.	4/2/2015	DPD	JAG
2	16-0261	UPDATED TO NEW STANDARDS. CH'D MATERIAL WAS 1018/1020 IS 1018/1020 CR; CH'D DIM WAS 5/16-24 IS 5/16-24 - 2A; CH'D FINISH WAS CAD PLATE YELLOW IS ZINC PLATE; CH'D SPEC WAS QQ-P-416F, TYPE II, CLASS II IS ASTM B633 TYPE I SC2.	12/5/2016	SM	JAG

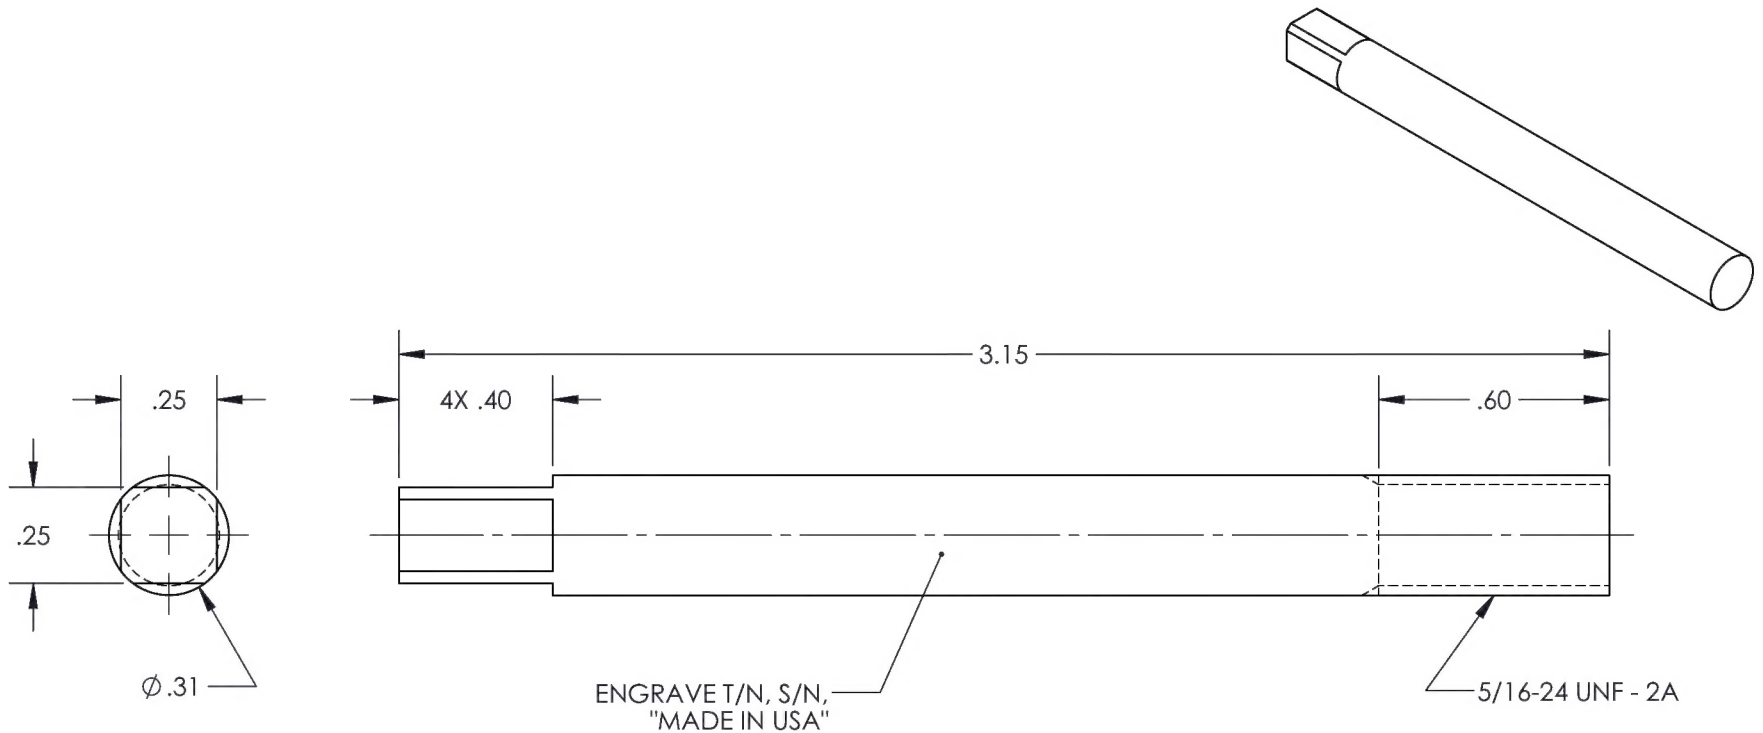

- NOTES:  
 1. REF. AGUSTA T/N: 3G6305G11051.  
 2. PART OF KIT: RBW6305G02831-3G.

<b>DART</b> AEROSPACE	
TITLE PIN, MGB UPPER FITTING INSTALLATION	
DWG NO. RBW6305G11051-3G	REV 2
MAT'L 1018/1020 CR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
HEAT TREAT	.XXX ± .005 FRACTIONS ± 1/8
FINISH ZINC PLATE	.XX ± .01 ANGLES ± 5°
SPEC ASTM B633 TYPE I SC 2	.X ± .1 SURFACES = 125° ✓
DRAWN BY: DUERFELDT	1. BREAK ALL SHARP EDGES .015 x 45° OR .015R
CHECKED: CLOUGH	2. DIMENSIONAL LIMITS APPLY AFTER PLATING
OPPS APPR: ANDERSON	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009
QA APPR: LINDSAY	USED ON MODEL
APPROVED: GILBERT	AW139
SCALE 2:1	DATE 3/10/2015
SHEET 1 OF 1	

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS
				1	PIN	1018/1020 CR	